

Manufacturer of Wood Entryways

Concerning and Concerning

Made In The USA

11




First and Lasting Impressions

For over a quarter century, Signature Door Inc. has supplied elegant custom doors and decorative glass to independent retail establishments and brought architects, builders and homeowners expertise and personal service.

Our doors feature state-of-the-art manufacturing on every production level.

We are committed to every phase of your project from initial design to finished product.


Thank you for supporting American Craftsmanship.

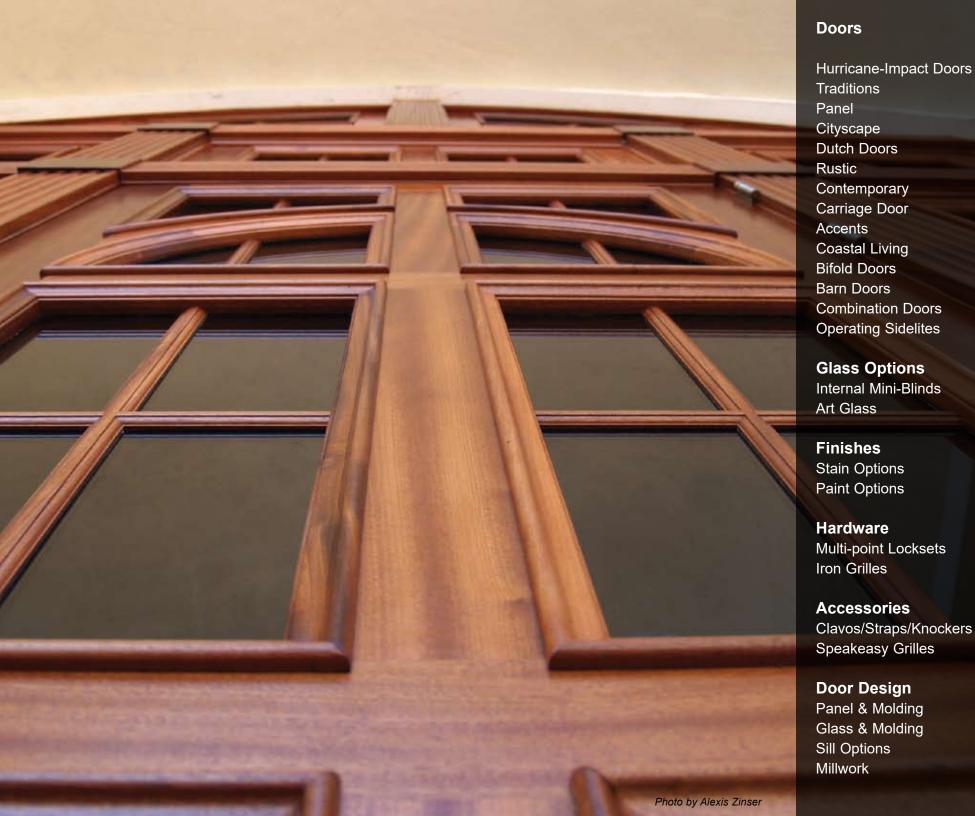

"It's the little details that are vital. Little things make big things happen" - John Wooden

Design Mour Entrep!


You have a dream. We make it reality.

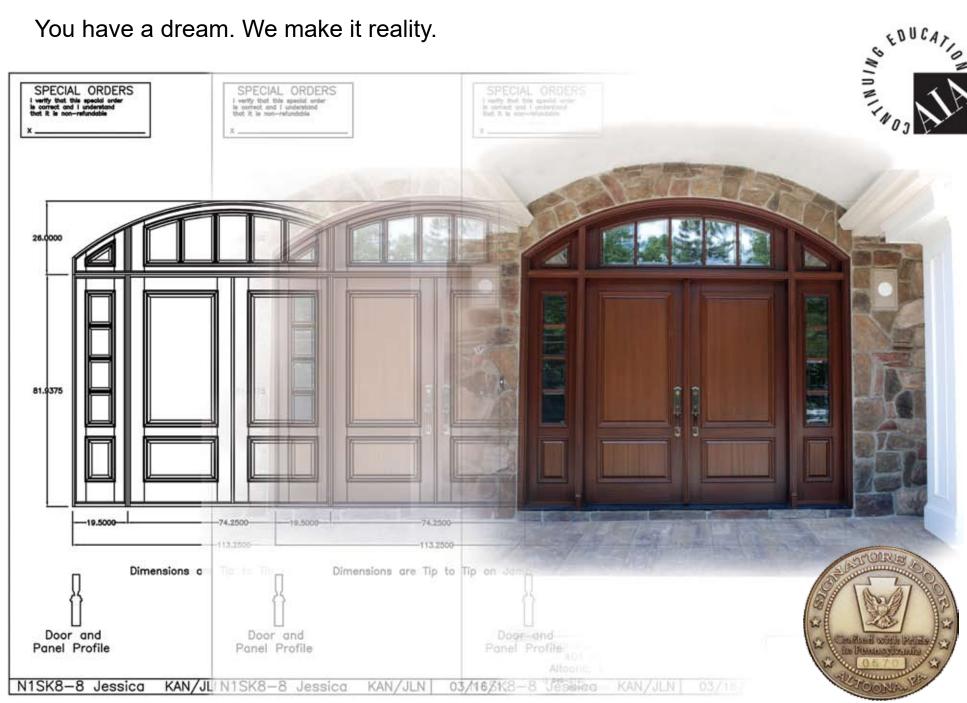



Every Door receives our "Signature Seal" medallion with a unique serial number.

Timeless Craftsmanship

- Appliques
- Carvings
- Custom Moldings

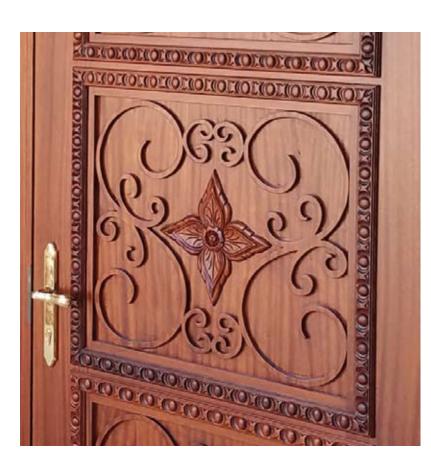

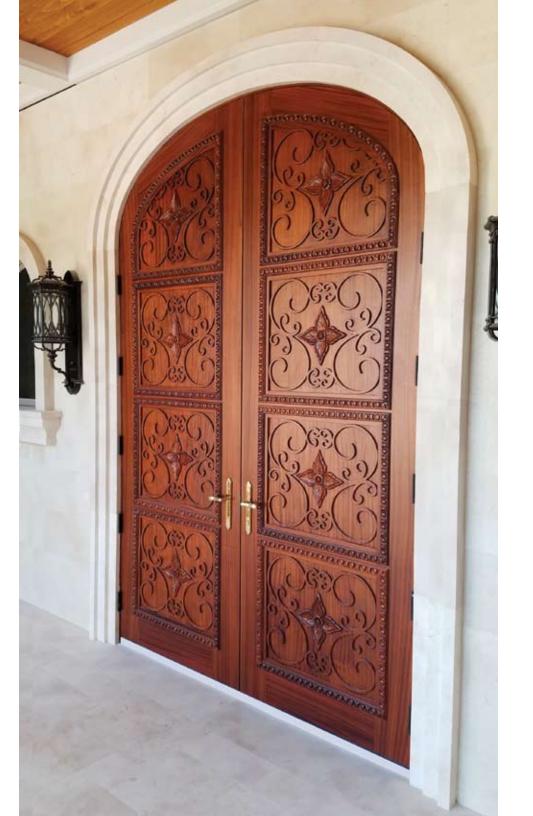







Hurricane-Impact Doors

- Our Category-5 Hurricane Impact Doors are Florida-State Approved with design pressures up to +65/-80.
- HVHZ rated
- D. P. ratings for non-impact.
- No shutters required.

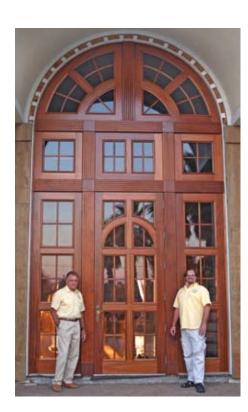



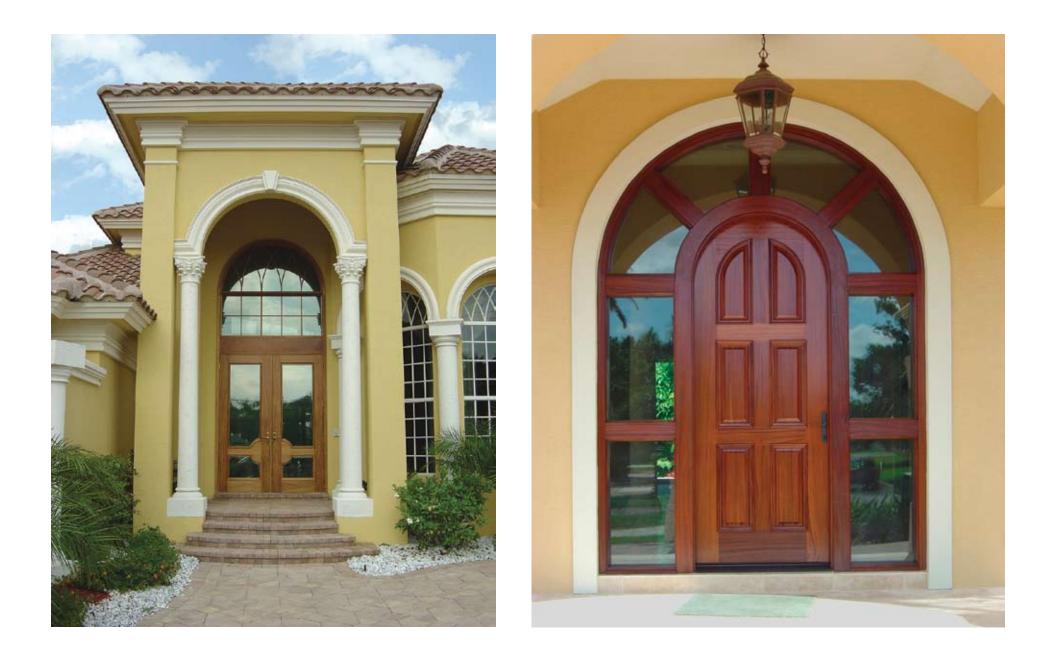





Traditions







Panel



Elegant Entryways are the first impression of what lies within.

Panel











Cityscape






Cityscape

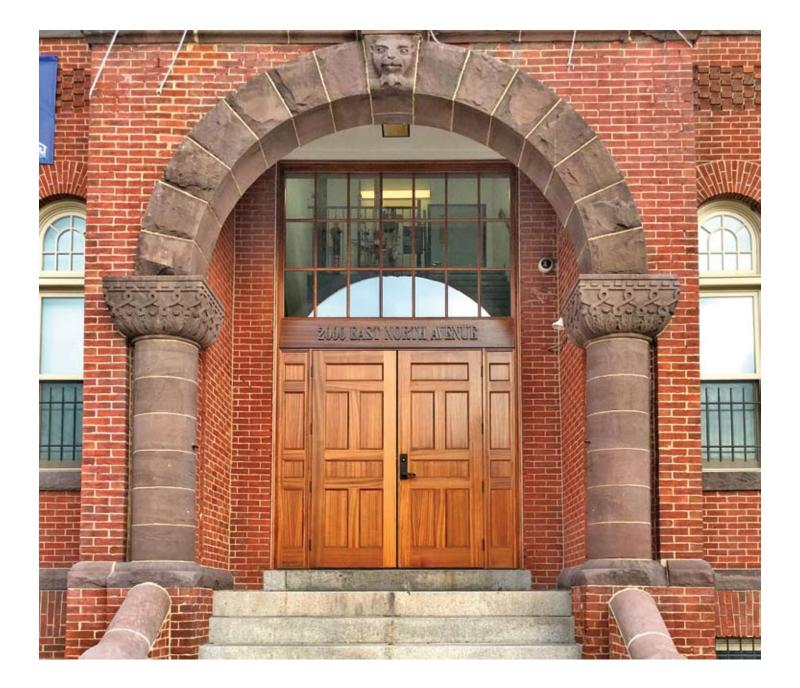

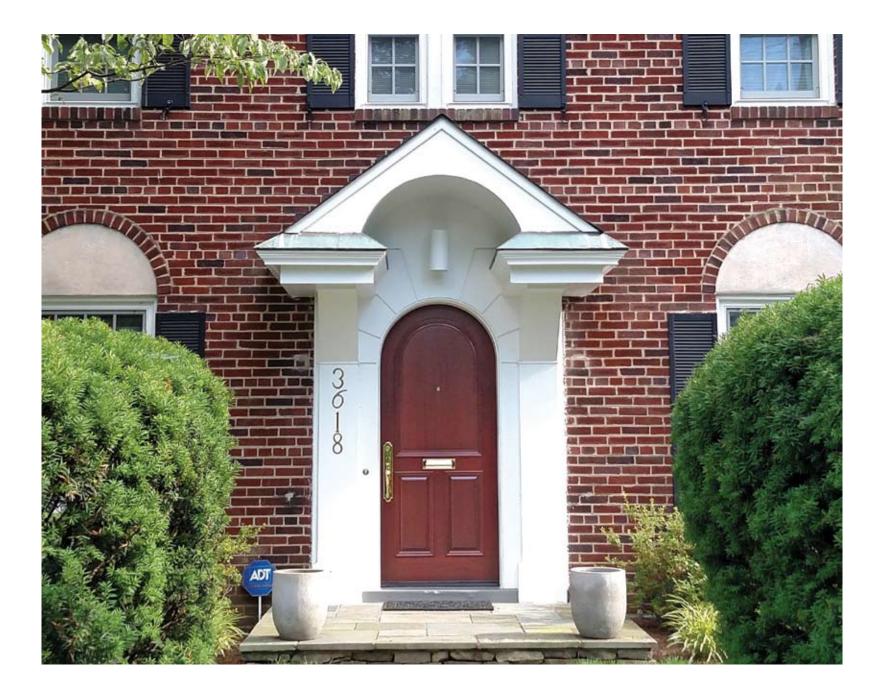





Dutch Doors

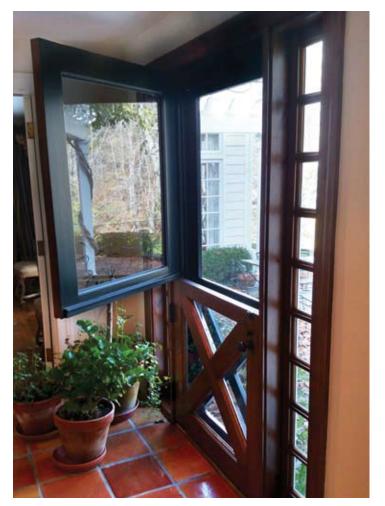

Door combo unit with screen door

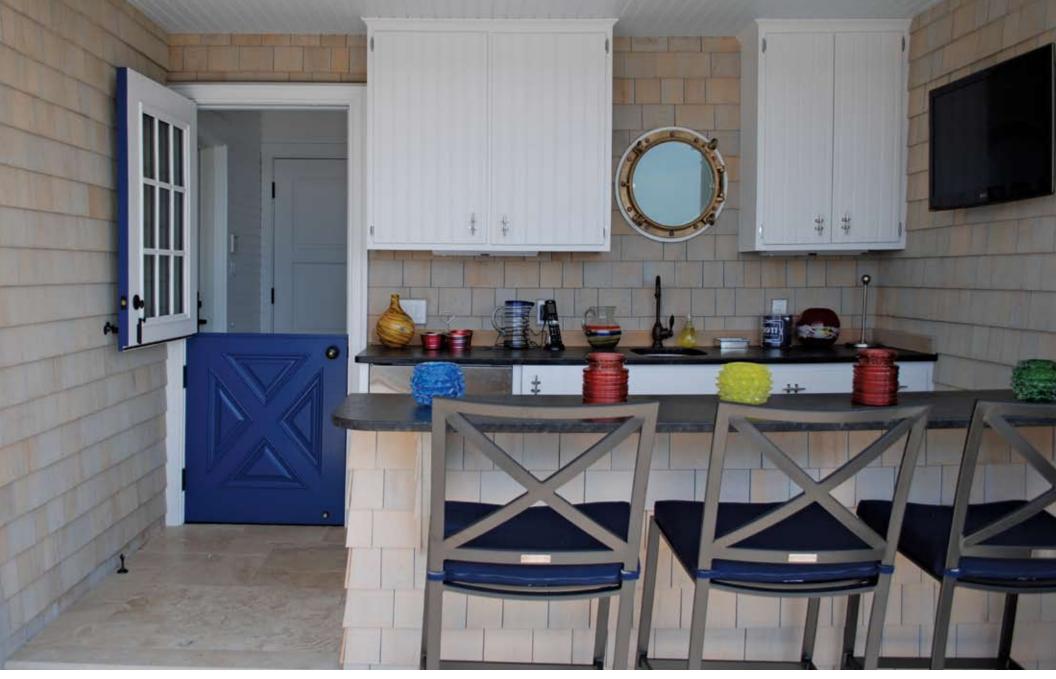


Blend indoor and outdoor living areas

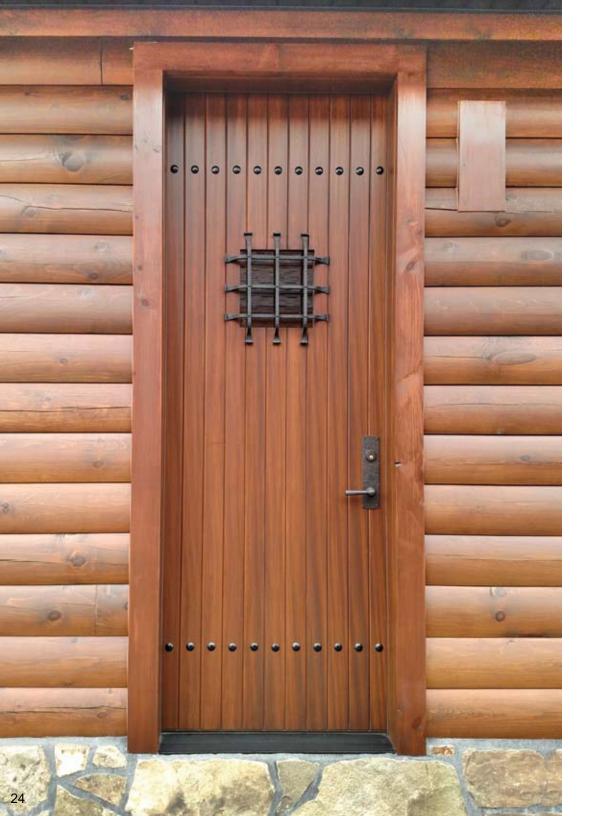


Rustic






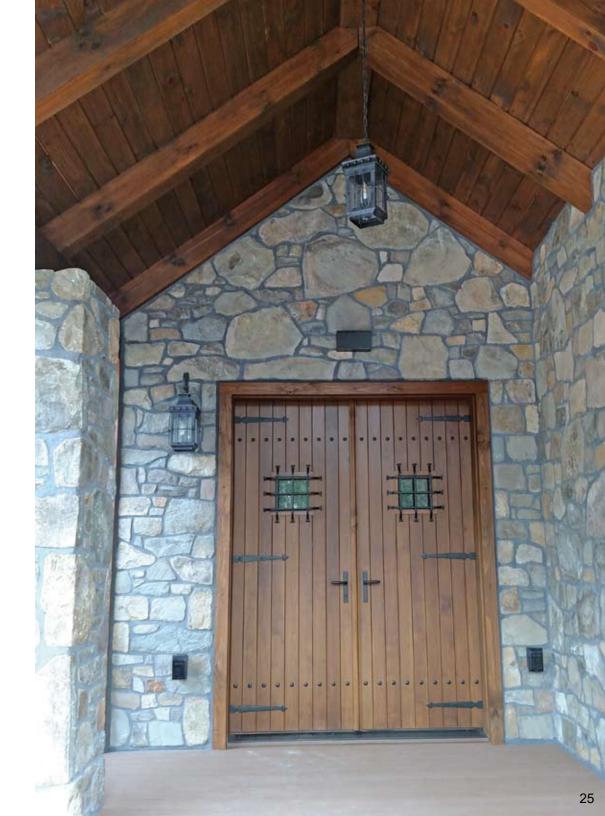

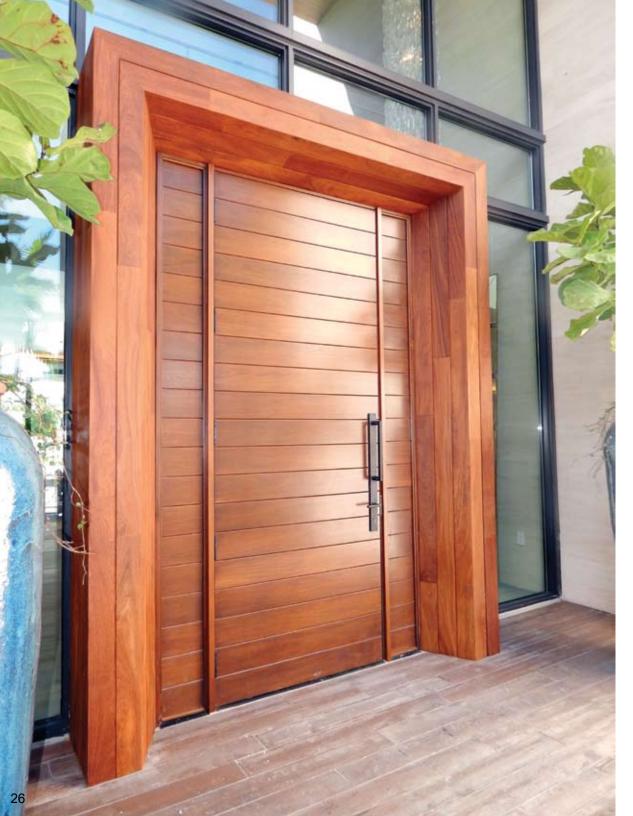

Contemporary



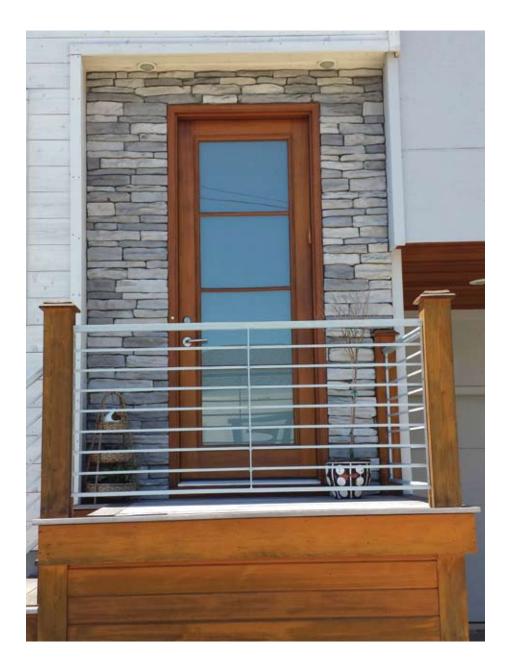






Carriage Doors





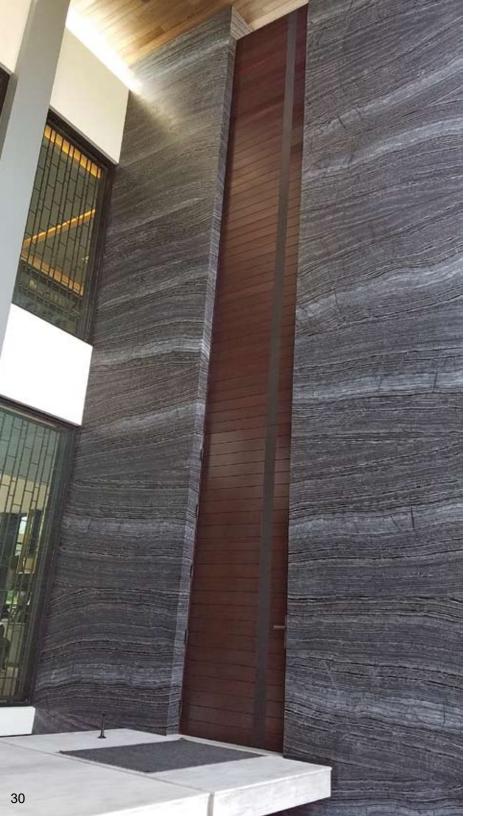

Accents










Coastal Living






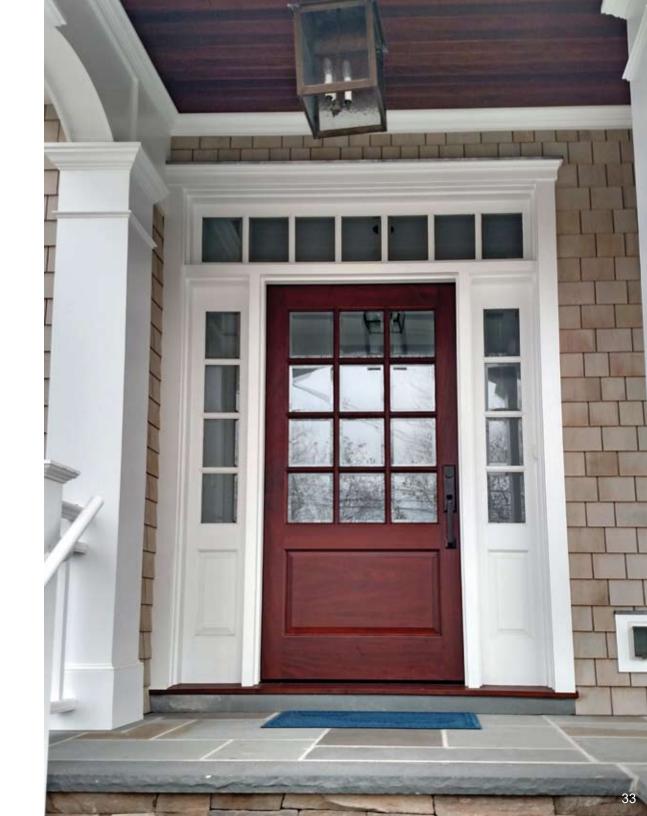

Coastal Living






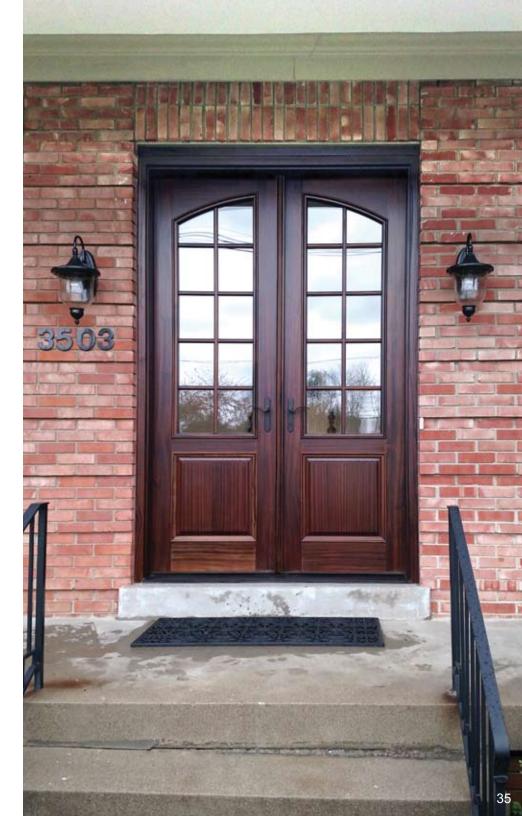

Coastal Living



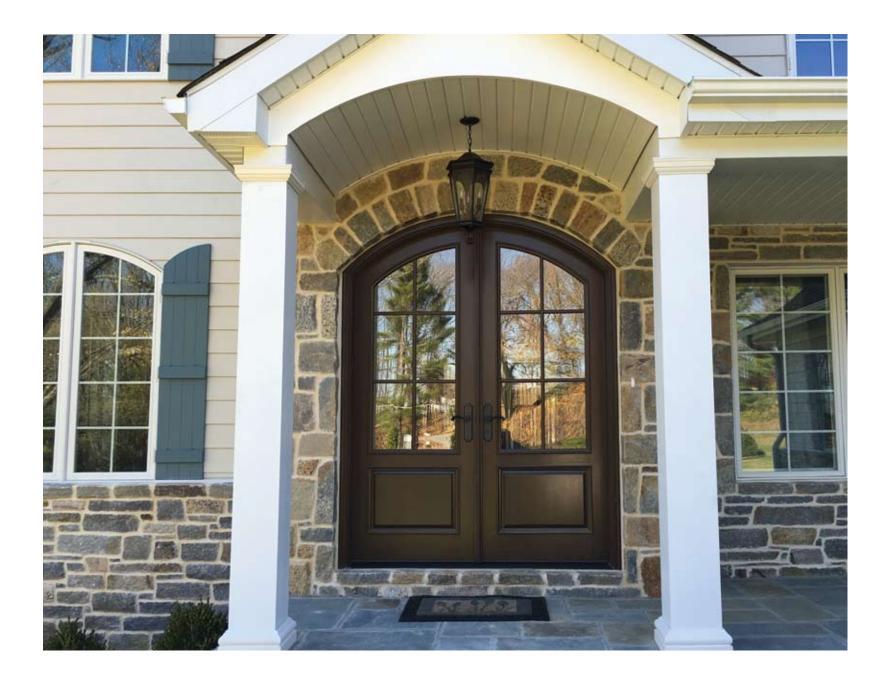





Bifold Doors





Retractable Screens up to 24' Wide





Barn Doors




Combination Doors







Easy, turn-key operation to switch screen & glass

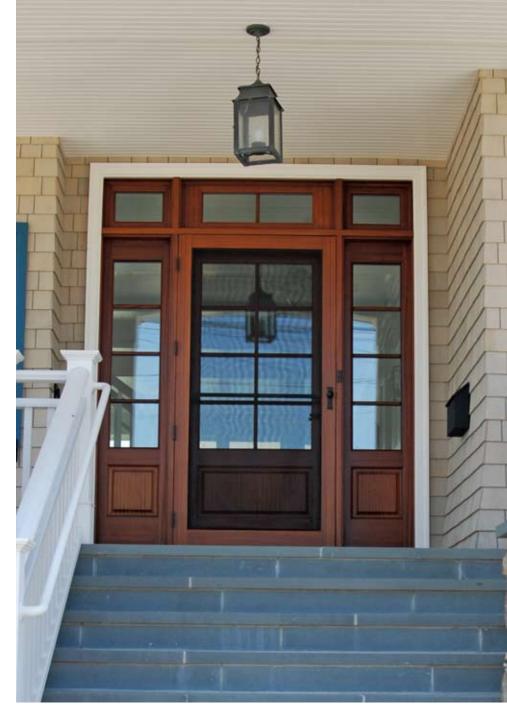

Storm and screen panels can be manufactured for your porch or outdoor living areas.


Operating Sidelites



Outswing



Inswing

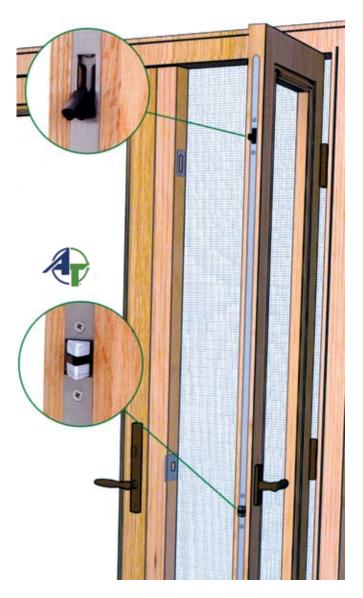

Operable inswing sidelites feature secure multi-point locking with easy hand-turn operation.

Internal Mini Blinds

Raise - Lower - Tilt





Available in white or earth tone

Hand-Crafted Art Glass






We welcome your creativity!



Take advantage of our in-house ability to create decorative door and fixed window glass to the size and shape you require. Allow us to incorporate your individual taste into a window and door system to add the perfect accent to your home.





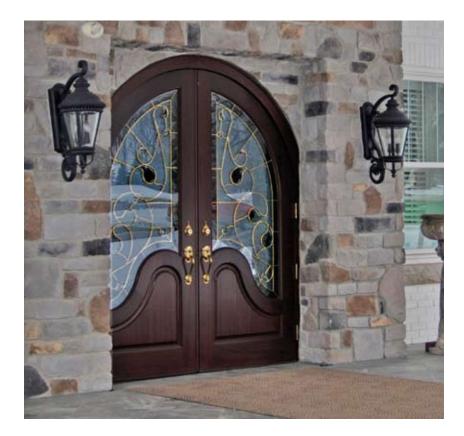



Hand-Crafted Art Glass



Texture Glass Options

(additional textures available)





Clear Baroque



Clear Water



Clear Seedy



Clear Rough-Rolled

Clear Glass Tint



Sandblast



Clear Rain

Frosted Delta



Glue Chip



Gray



Bronze

Above colors are approximate

Factory Finishing

Get a head start on installing your door system -Allow us to finish your entryway.

Factory Finish Options

Sapele Mahogany



While these color samples are as accurate as possible to the finished product, exact colors may vary slightly depending upon the natural color of the door specie.

Contact your Signature Door sales associate regarding color samples

Custom Stain Color Matching Available



Factory Paint Options


We can mix any color you desire including those approved by your local historic district commission.





Multi-Point Locksets

HOPPE® Trim Options

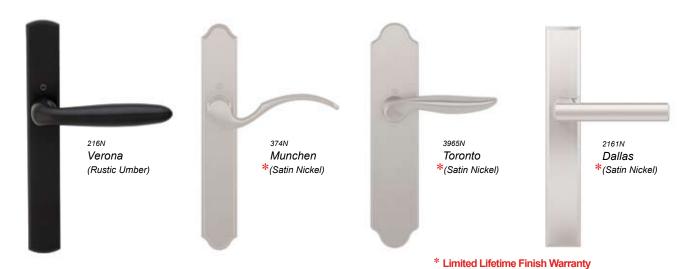

Ashley Morton Trim Options





Made In The USA!

Trim Options





E457/L117 (silicone bronze, dark patina)



Highest quality bronze tinted with hand applied patinas

E754/L125 (silicone bronze, dark patina)



Iron Grilles








Operable or fixed







Custom Ironwork

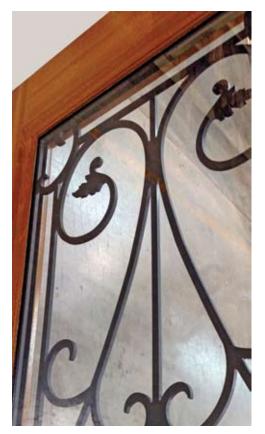

Insulated Grilles (Between Glass)


Accessories



Speakeasy Hardware






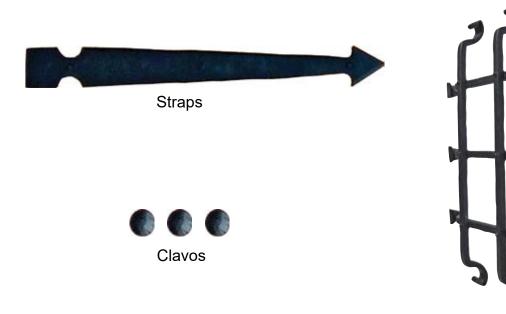


Grilles

Door Construction

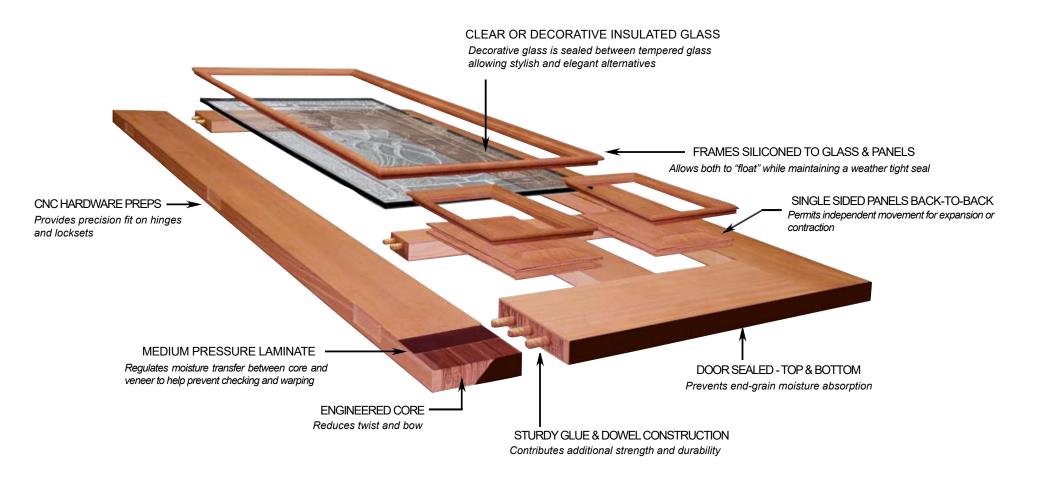


- Wood doors are not suitable for direct-exposure applications.
- Our door is engineered to minimize the effects that are commonly associated with wood doors. Warping, twisting and bowing are a few complaints of wood door owners when their doors are subjected to the harsh weather conditions found in the northern regions and along the coast.
- The Signature System allows all components to operate independently, yet cohesively with one another.


Panel & Molding Combinations




Raised Panel Molding Ogee Panel




Raised Panel Molding Traditional Panel




Raised Panel Molding **Classical Panel**




Raised Panel Molding Standard Panel



Recessed Molding Standard Panel




Recessed Molding WB11 Bolection Standard Panel




Recessed Molding WB31 Bolection Standard Panel


-134 -




Recessed Molding WB21 Bolection Standard Panel




Traditional Panel




Recessed Molding WB41 Bolection Standard Panel




Mission Molding Flat Panel



Recessed Molding W/ WB21 Bolection **Classical Panel**



Flat Panel




Recessed Molding WB21 Bolection and WB11 Bolection on Ogee Panel




Recessed Molding Style B Standard Panel







Glass & Molding Combinations

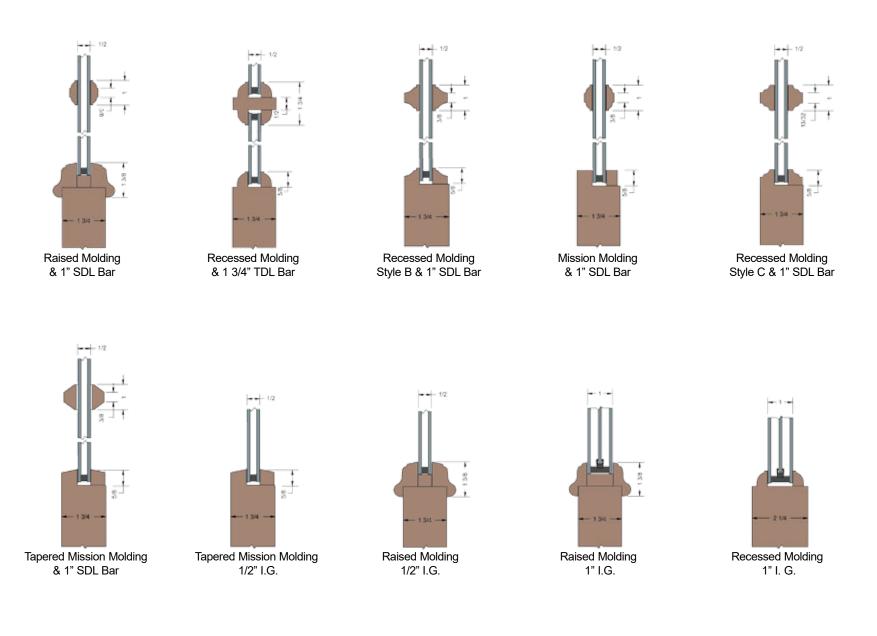

Prehang Details




Non-Impact Prehang Details with Standard Jamb and Inswing Sill



Non-Impact Prehang Details with Standard Jamb and Inswing Sill and Storm Door Attached

Sill Options




Impact Inswing Sill

Available with 1 1/4", 2" or 3 1/4" extensions




Available in a variety of depths.




Non-Impact Bumper Sill

Available in a variety of depths.



Available in a variety of depths.




Impact Bumper Sill B

A 1 1/4" extension is available for BMC



Interlocking Sill

Available in a variety of depths.




Non-Impact ADA Sill

Available in a variety of depths.

	~	a	
34			

Solid Wood Bumper Sill

Available in a variety of depths.

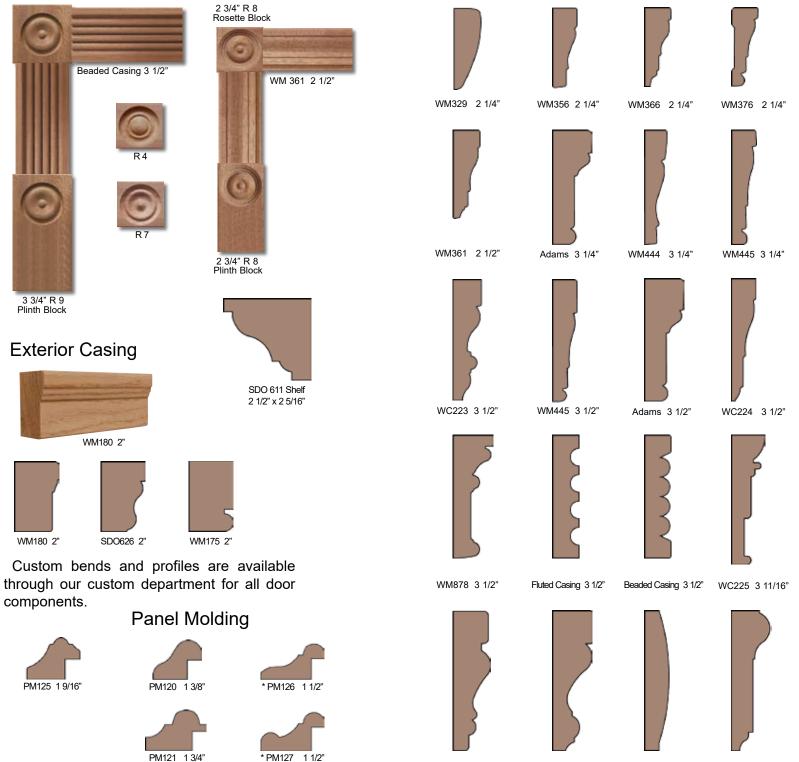


WC214 4"

WC216 4"

WC218 4"

WC220 4"

WC221 4"

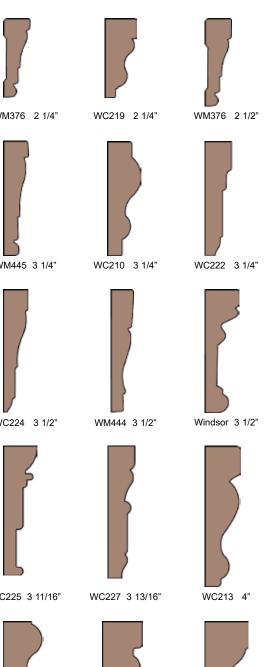



* Not available for rated door units

3 3/4" R 9 Plinth Block

WM180 2"

components.

PM125 1 9/16"


Signature Door Inc. warrants its products (finished or unfinished) sold under this warranty to be free of defects in materials and workmanship for one year from the date of purchase from the manufacturer or factory authorized distributor. Products containing insulated glasslights are warranted against glass seal failure for 10 years. This warranty takes precedence over all other warranties, expressed or implied.

This warranty is extended only to the original purchaser/consumer who does not purchase for resale or for use in the ordinary course of their business operations (IE: display purposes).

Products that are delivered unfinished from Signature Door Inc. must be properly sealed to prevent absorption of moisture. All sides recommended to be finished evenly within 72 hours of receipt and must be kept in a climate-controlled environment beforehand. *Notice:* ALL doors, even when factory pre-finished, must be maintained on a constant basis. Maintenance frequency depends on the amount of weather exposure the finish receives.

This warranty does not cover damage caused by others or by a cause beyond Signature Door's control, including but not limited to: damages caused by misuse, abuse, accident, or mishandling; or damages caused by acts of God, fire, flood, earthquake, or other storms. Misuse of a door includes, but is not limited to, hanging a door without providing adequate overhang or applying an inappropriate finish.

An overhang is required to retain this warranty. The protective overhang must be equal to, or greater than, the distance from the bottom of the sill to the base of the overhang. See figure 1.



In order to reduce the chance of warping or checking, dark-colored finishes should be avoided on all surfaces, especially on light-colored wood species, or if the door is exposed to direct sunlight.

This warranty does not cover any defects caused by:

- Product failure due to improper or incorrect installation; This includes bow or misalignment in the frame in which door is hung, if the door was purchased as a slab only.
- Modification, alterations (including trimming and cutting down door), repair or service of this product by anyone other than the manufacturer or without their consent.
- Any use of the product other than for which it was intended.
- · Door warpage (whether cup, bow or twist) unless it exceeds the following dimensions.
 - » 1/4" in doors up to a 4/0 nominal width and a 6/8 nominal height
 - » 3/8" in doors up to a 4/0 nominal width and a 8/0 nominal height
- Warping of doors in excess of a 6/8 nominal height without a multipoint locking system installed by Signature Door Inc. Though not always detrimental to the structural integrity of a door unit, pressure at a singular point (EG: cylindrical or mortise locks installed at a 35 1/4" latch height) is known to cause bowing on doors in excess of a 6/8 nominal height.
- Doors in excess of 48" in width or 120" in height.
- Door designs that include possible problematic details as warned against by an SDI Sales Associate prior to purchase (EG: plank doors with planks in excess of 5-6"; stile/rail components in excess of 9", uncomplimentary slab thickness on certain size doors, etc.)
- · Products installed in or subject to high moisture or high humidity environments, including new homes with uncured plaster, drywall, concrete or ceramic tile.
- Products installed in direct sunlight (see above overhang requirements).
- Products subjected to unusual stress or strain such as that resulting from the movement or expansion/contraction of building or building components.
- Products not properly sealed or maintained as set forth above.
- · Scratches, abrasions, or other damage caused by improper handling or cleaning.
- Failure to perform normal homeowner's maintenance, including maintaining the finish top coat. Please see Signature Door "Maintenance Information" for guidance.
- Panel movement (contraction/expansion) of 1/8" or less. Temperature and humidity levels are known to cause wood panels to contract or expand within the opening (particularly solid wood panels).
- Solid wood panels wider than 14" measured across the grain (IE: horizontal [x] dimension on a vertical [y] grain panel).
- Issues caused by extreme temperature build-up where a storm door is utilized. Storm doors are recommended to also include an interchangeable screen to allow for appropriate ventilation.

Variations in the wood color, texture, pattern and/or grain are considered characteristics of the wood and are not considered defects.

If a product becomes defective within the specified warranty period, Signature Door Inc. will repair or replace, at our discretion, any part(s) that appear to be defective in material or workmanship. The problem should be reported to the original place of purchase, along with the original purchase information. Signature Door Inc. will refund the purchase rise price if the defects in the products are ones covered by this warranty and Signature Door Inc. is unable, by repair or replacement, to make the product perform properly. Signature Door Inc. is not liable for any installation, removal, or shipping charges in connection with the inspection, repair, or replacement of defective parts.



Custom Wood Entryways

401 Priority St., Altoona, PA 16602 Phone: 1.800.741.2265 Fax: 1.814.949.2776 www.signaturedoor.com sales@signaturedoor.com Social Media links

D 🖸 🖓 🔽 👍



AN